

(12) UK Patent Application (19) GB (11) 2 260 547 (13) A

(43) Date of A publication 21.04.1993

(21) Application No 9219992.6

(22) Date of filing 22.09.1992

(30) Priority data

(31) 03266068

(32) 15.10.1991

(33) JP

(71) Applicant

Kabushiki Kaisha Toshiba

(Incorporated in Japan)

72 Horikawa-cho, Saiwai-ku, Kawasaki-shi,
Kanagawa-ken, Japan

(72) Inventors

Tokihiko Ikemizu

Katsuharu Matsuo

Masahiro Imai

(74) Agent and/or Address for Service

Marks & Clerk

57-60 Lincoln's Inn Fields, London, WC2A 3LS,
United Kingdom

(51) INT CL⁵

D06F 37/20

(52) UK CL (Edition L)

D1A ACD AC109 AD245 AE111

F4G GBCL

(56) Documents cited

GB 2124662 A

EP 0349798 A2

EP 0302319 A1

US 4411664 A

(58) Field of search

UK CL (Edition K) D1A AAB ACA ACC ACD ADN,

F4G GBCL

INT CL⁵ D06F

Online databases: WPI

(54) Abnormal vibration detecting device for washing machine

(57) An abnormal vibration detecting device for detecting abnormal vibration of a rotational tub (14, fig 6) of a washing machine includes an abnormal vibration detector which includes a rotational speed detecting section 36 detecting the rotational speed of a motor (16) driving the rotational tub (14) and a comparator section 38 comparing a speed signal detected by the rotational speed detecting section 36 with a reference speed signal based on the rise characteristic of rotational speed of the rotational tub (14) when the rotational tub (14) is rotated in an unbalanced state. The device may also include a further abnormal vibration detector which comprises a switch (24) operated by a lever (25) which is contacted by the tub (14) when it vibrates transversely during abnormal vibration.

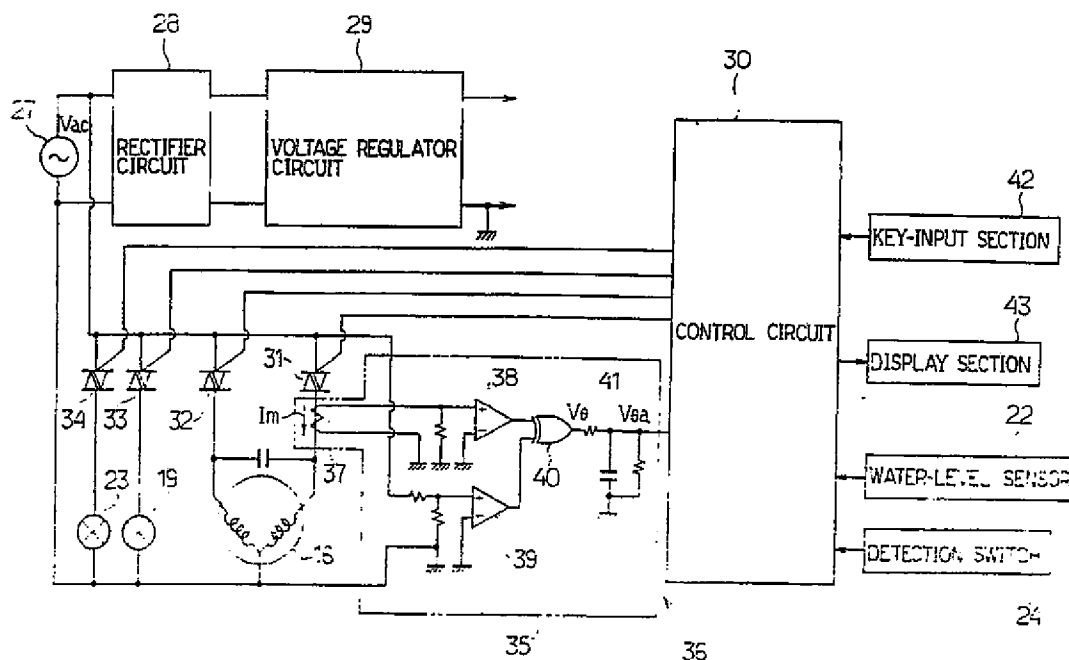


FIG.1

GB 2 260 547

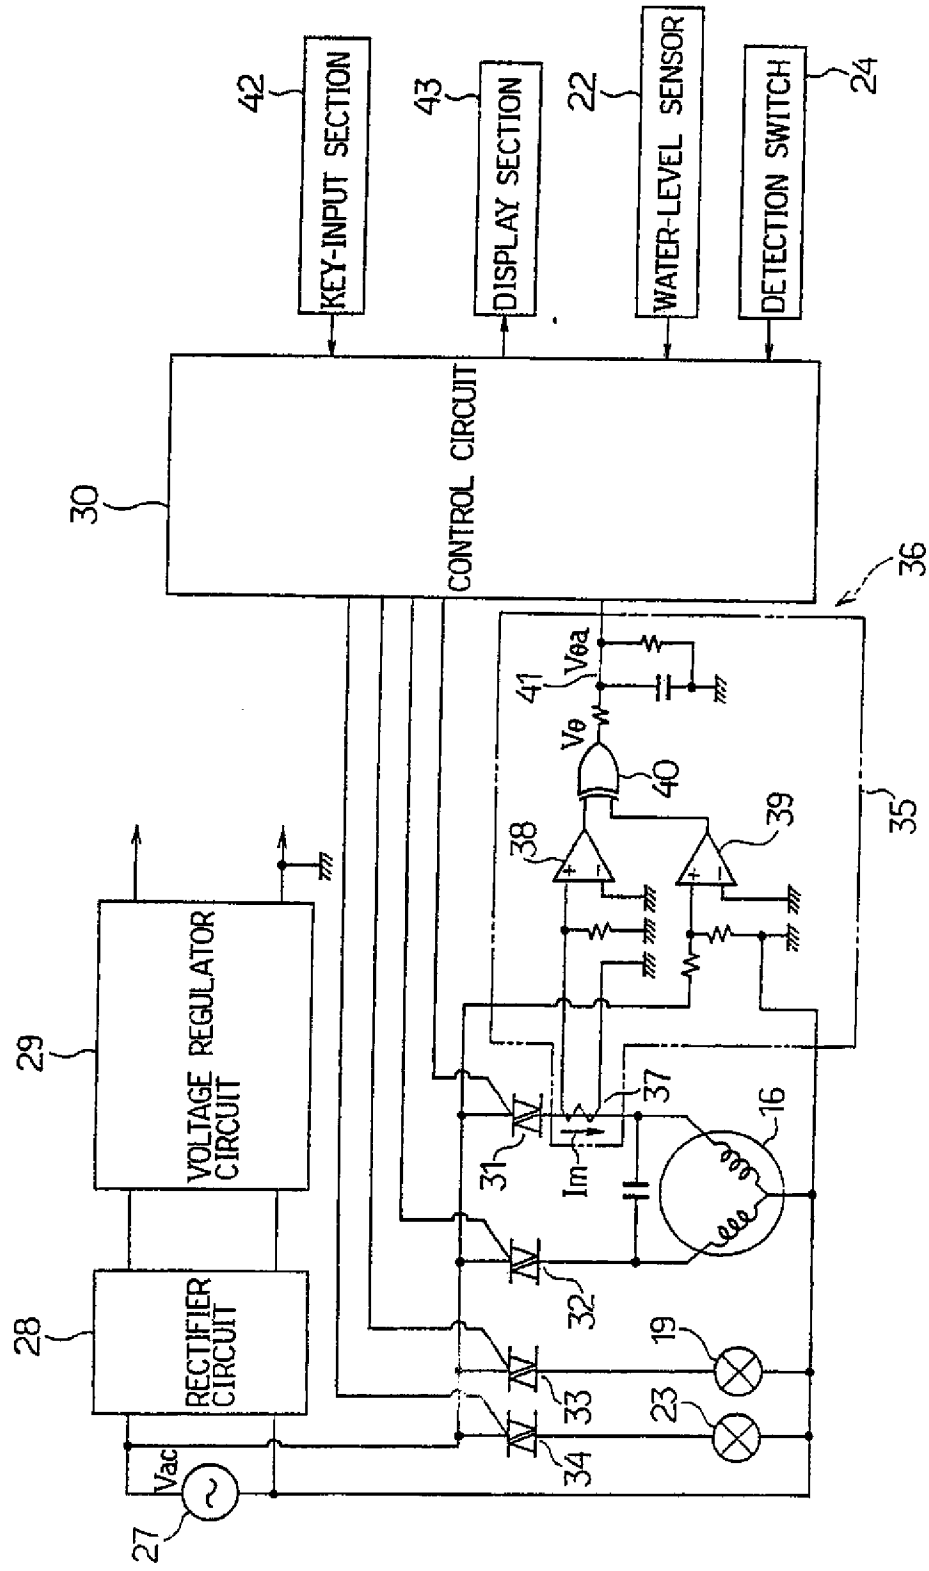


FIG.1

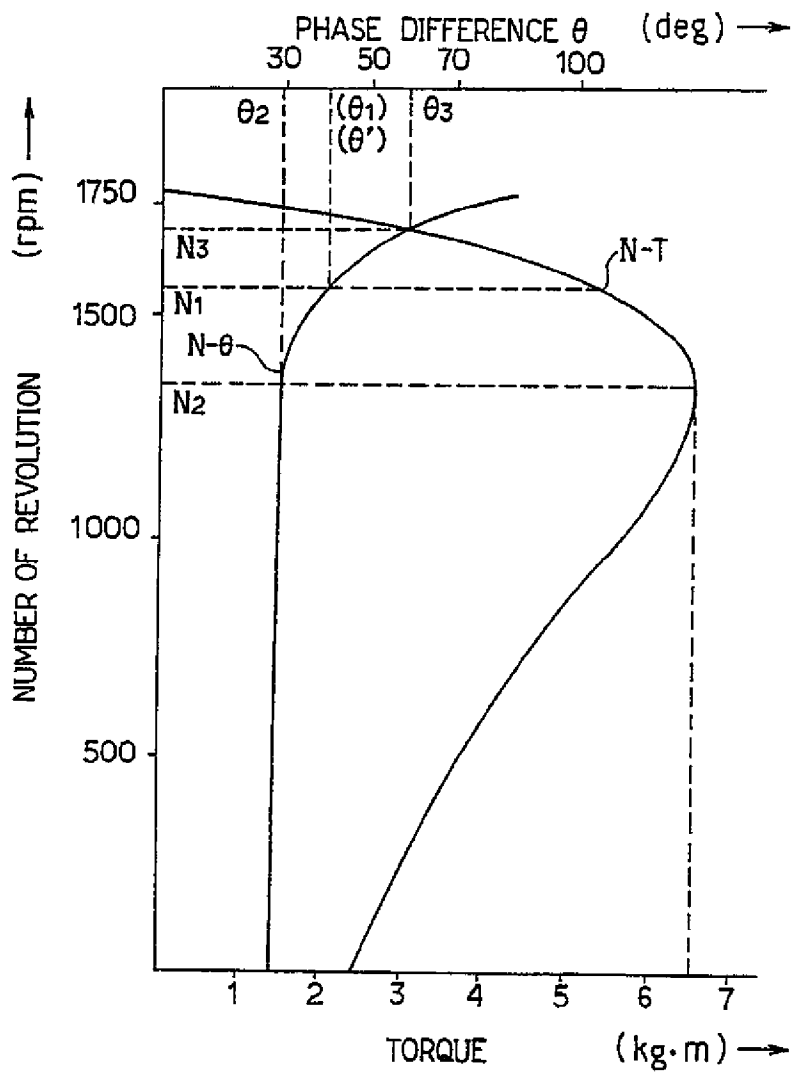
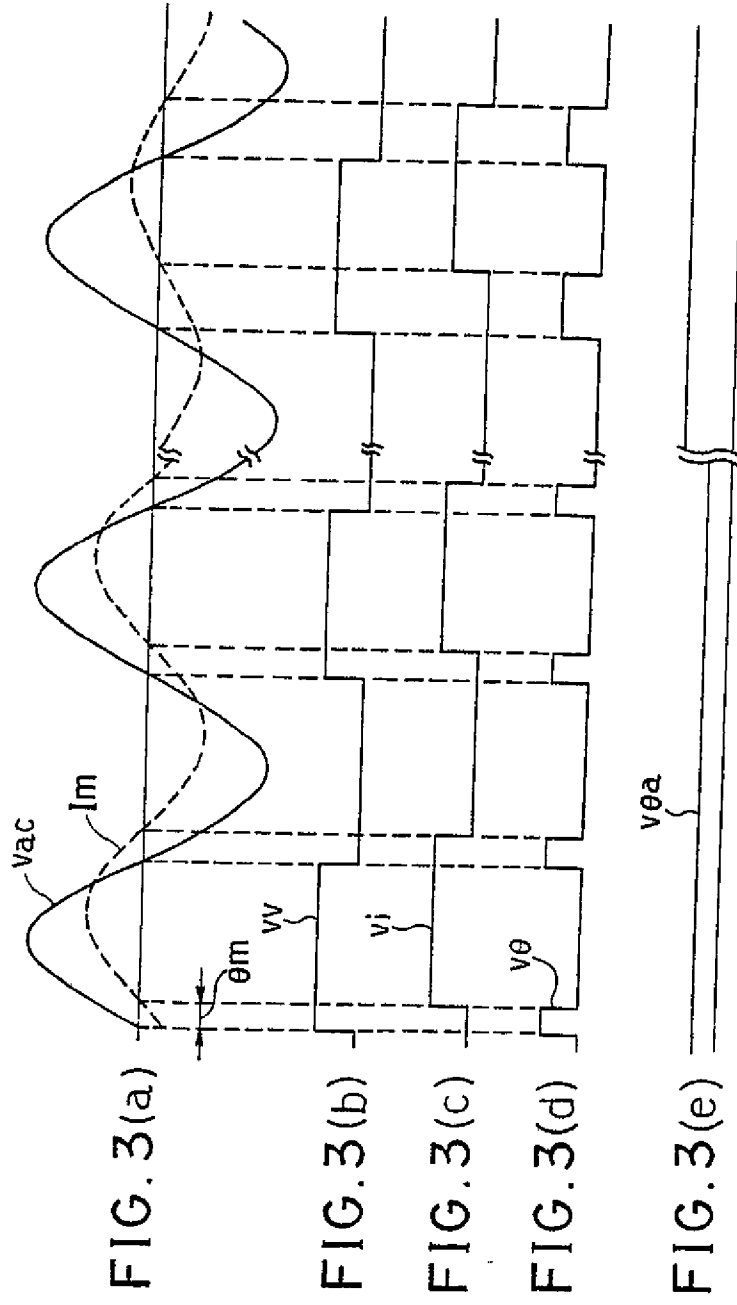


FIG. 2



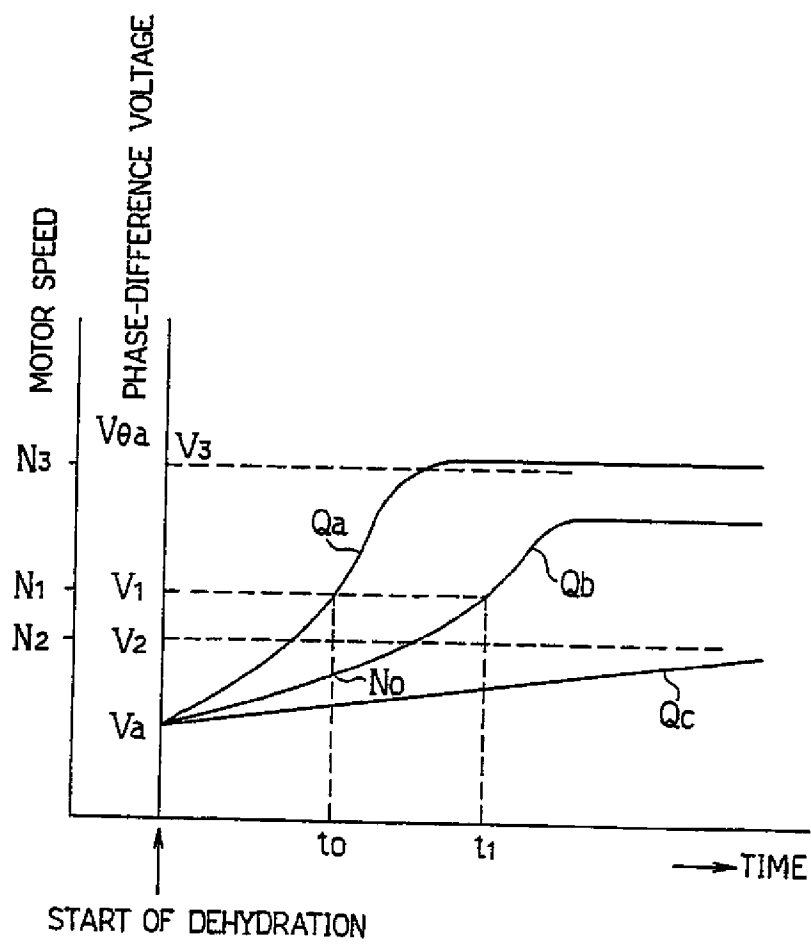


FIG.4

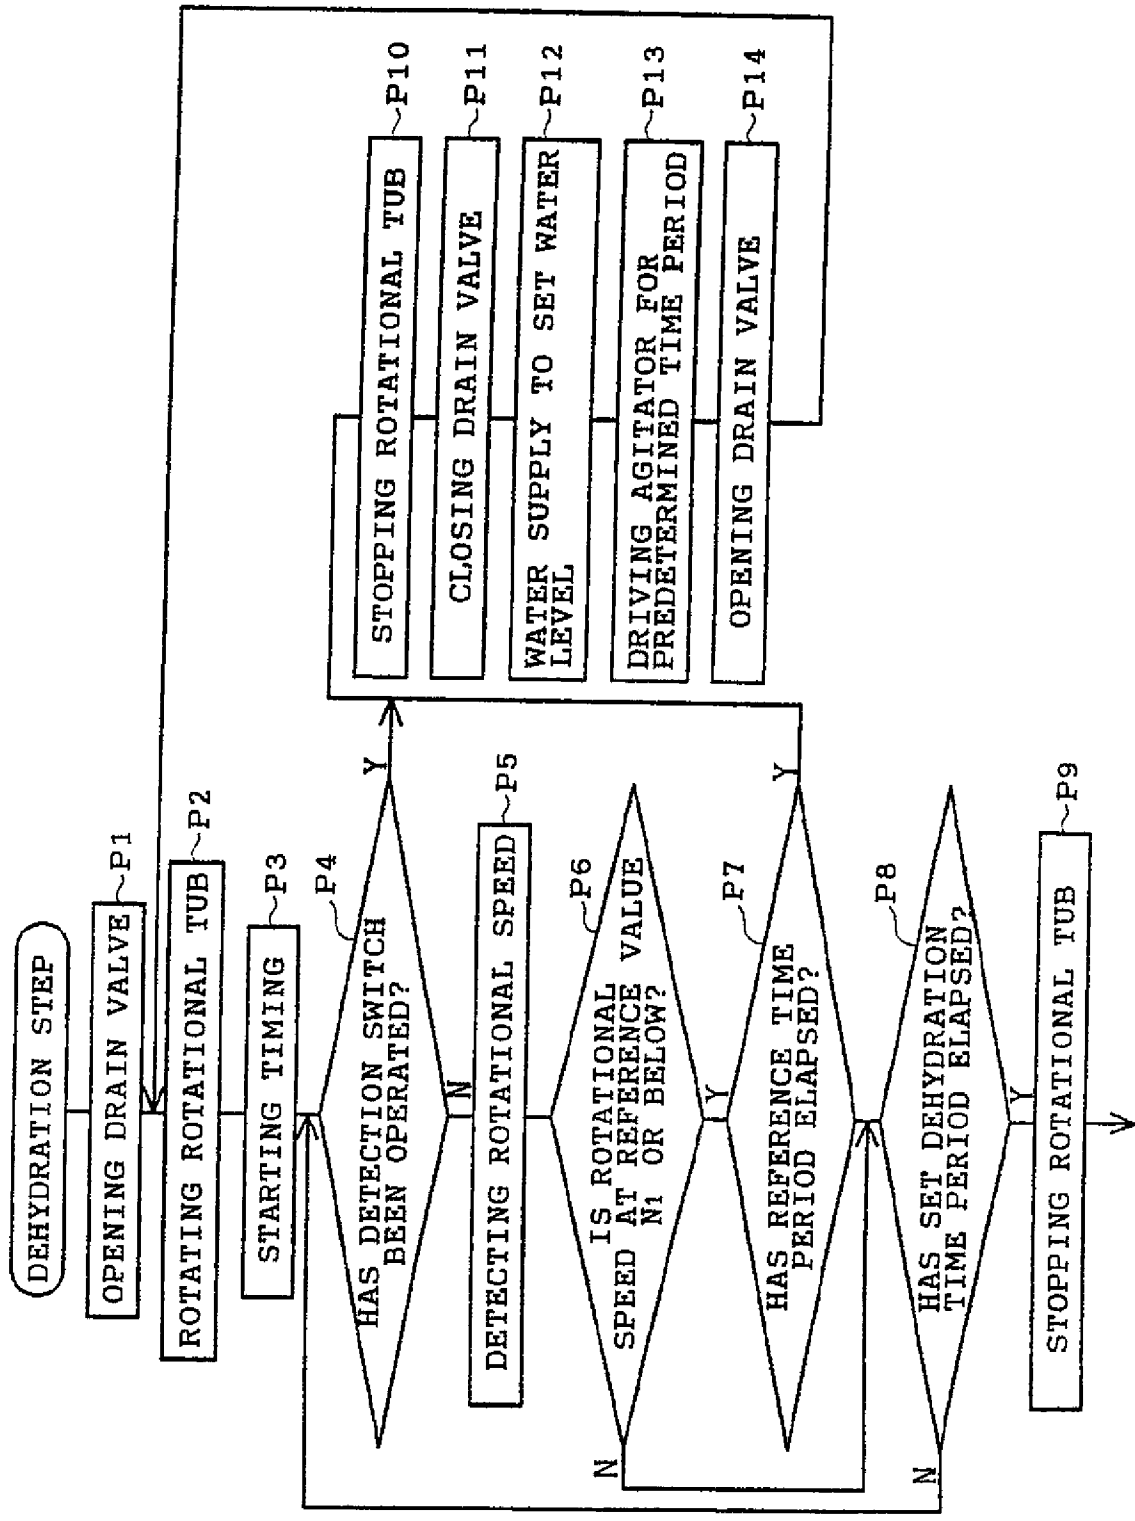


FIG. 5

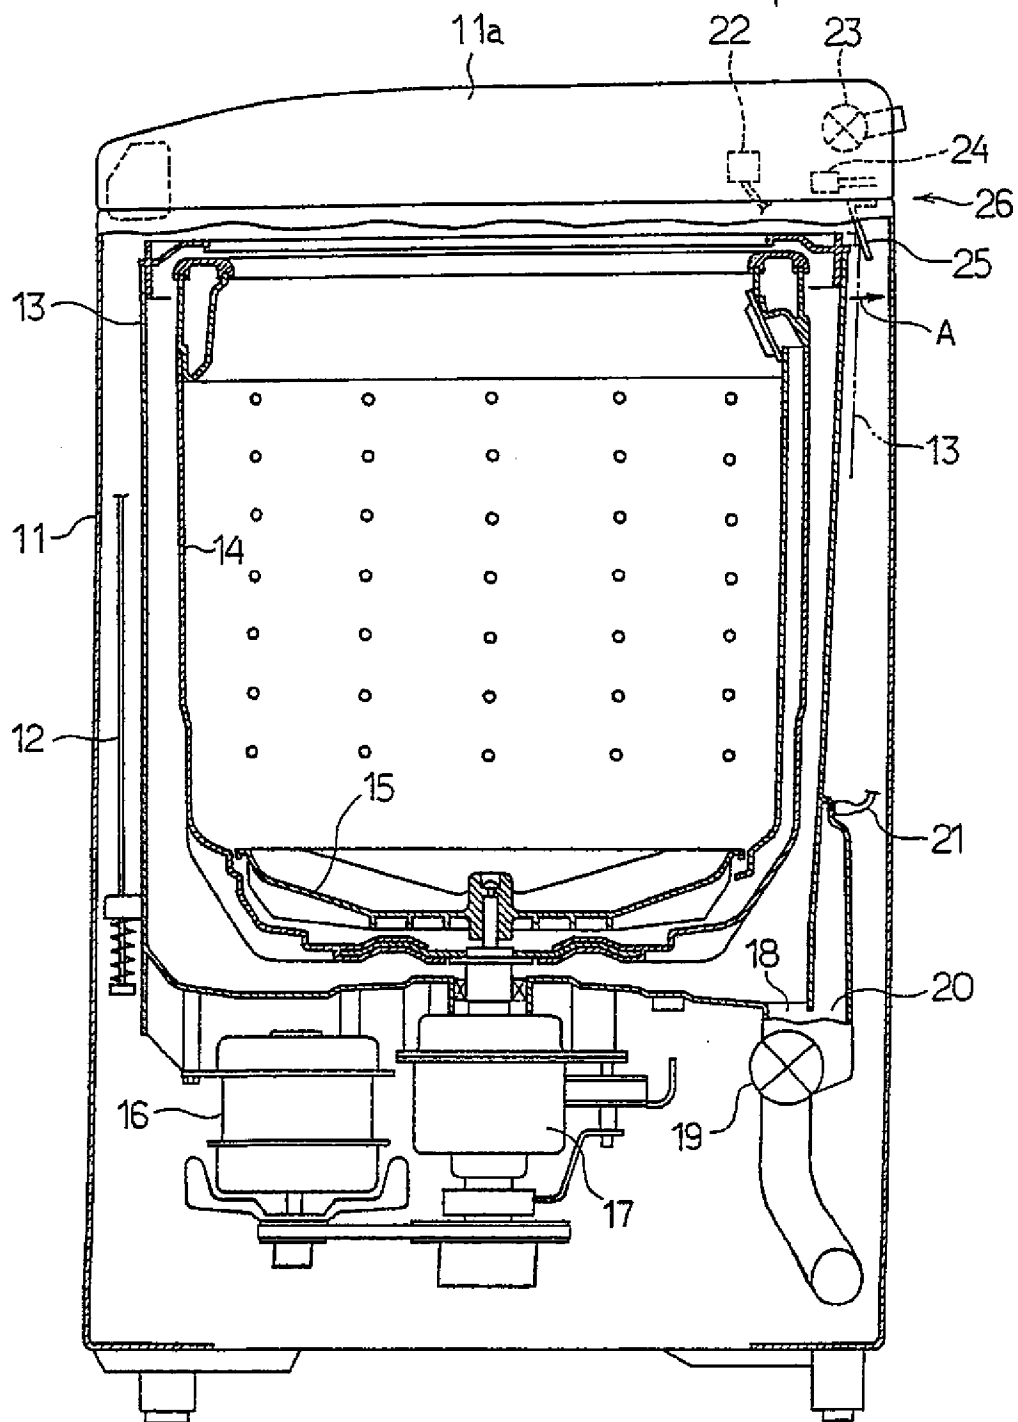


FIG.6

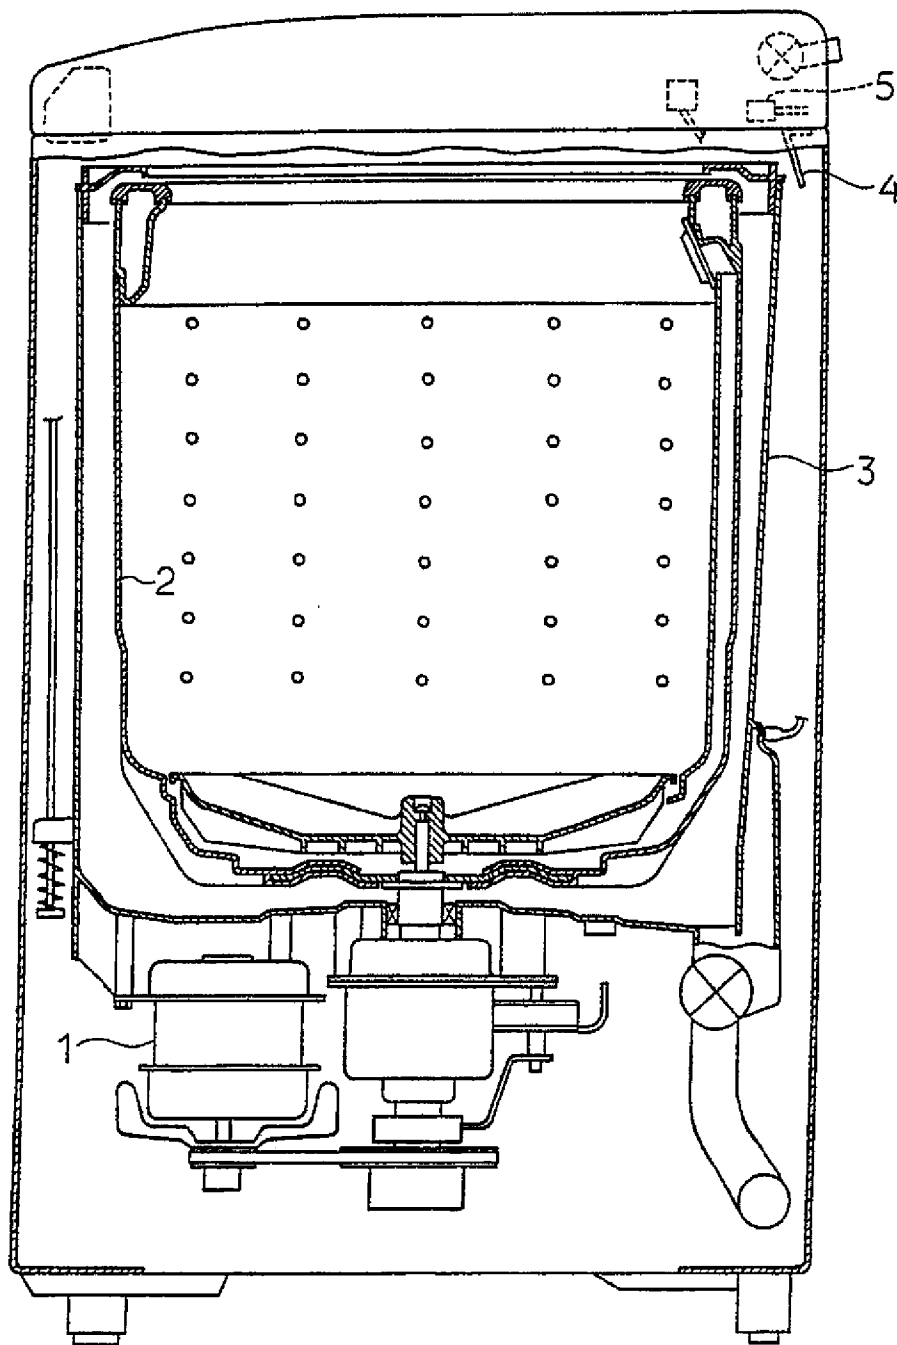


FIG.7 (PRIOR ART)

ABNORMAL VIBRATION DETECTING DEVICE FOR WASHING MACHINE

This invention relates to an abnormal vibration detecting device for a washing machine for detecting abnormal vibration during rotation of a dehydration tub, and
5 more particularly to such an abnormal vibration detecting device of the type that the abnormal vibration of the dehydration tub is detected based on motor speed characteristics.

In conventional automatic washing machines, a
10 rotational tub 2 serving both as a wash tub and a dehydration tub is driven by a dehydration motor 1 also serving as a wash motor, as shown in FIG. 7. The dehydration tub 2 is sometimes rotated in an unbalanced state during the dehydrating operation. In such a case, the
15 dehydration tub 2 abnormally vibrates during its rotation. This abnormal vibration of the dehydration tub 2 is detected so that the dehydrating operation is interrupted. More specifically, upon occurrence of rotation of the dehydration tub 2 in the unbalanced state, a water-receiving tub 3 is
20 abnormally vibrated as well as the dehydration tub 2. A detection lever 4 is provided for detecting the abnormal vibration of the water-receiving tub 3. The dehydrating operation is interrupted by a detection switch 5 responsive to the detection lever 4. The detection lever 4 is engaged
25 with the water-receiving tub 3 only when the dehydration tub 3 is abnormally vibrated. The abnormal vibration of the

dehydration tub 2 or the water-receiving tub 3 is thus detected mechanically.

The dehydration tub 2 is vibrated not only in the transverse direction but also in the vertical or longitudinal direction during the dehydrating operation. As a result, the dehydration tub 2 is abnormally vibrated in a mode that the transverse and longitudinal vibration components are composed. The above-described abnormal vibration detecting means comprising the detection lever 4 and the detection switch 5 are mainly suitable for detecting the transverse vibration component and not suitable for the detection of the longitudinal vibration component.

The rotational speed of the dehydration tub 2 is not increased desirably even when the vibration is mainly composed of the longitudinal vibration component, and accordingly, there is a possibility that the operation of the washing machine continues without smooth progress of the dehydration.

Means has been proposed for exclusively detecting the longitudinal movement of the dehydration tub 2. However, actual vertical movement of the dehydration tub 2 does not reflect the magnitude of the longitudinal vibration. Consequently, it is difficult to detect the abnormal longitudinal vibration by the method that the vibratory movement of the dehydration tub is mechanically converted to strokes, as is described above.

Therefore, an object of the present invention is to

provide an abnormal vibration detecting device for a washing machine wherein the vibration due to rotation of the rotational tub in the unbalanced state can be reliably detected.

5 The present invention provides an abnormal vibration detecting device for a washing machine having an outer cabinet, a rotational tub mounted via elastic suspension means in the outer cabinet for enclosing clothes to be washed and an electric motor driving the rotational tub in a
10 dehydration operation, the abnormal vibration detecting device comprising rotational speed detecting means for detecting a rotational speed of the rotational tub, the rotational speed detecting means generating a detection signal representative of the detected rotational speed of
15 the rotational tub, storage means for storing data of predetermined rotational speed rise characteristics of the rotational tub as abnormal condition determining data, the predetermined rotational speed rise characteristics being in accordance with rise characteristics of the rotational speed
20 of the rotational tub when the rotational tub is rotated in an unbalanced state, and abnormal condition determining means comparing data of the rotational speed represented by the detection signal generated by the rotational speed detecting means with the abnormal condition determining data
25 stored in the storage means, for determining whether or not the rotational tub is being rotated in the unbalanced state.

In accordance with the above-described abnormal

vibration detecting device, the abnormal condition determining data is in accordance with the rise characteristics of the rotational speed of the rotational tub in the stated that its rotational speed does not smoothly rise at the starting because of its rotation in the unbalanced state. Accordingly, occurrence of the abnormal vibration is reliably predetermined from the comparison of the rotational speed data obtained by the rotational speed detecting means with the abnormal condition determining data.

The vibration of the rotational tub is converted to the mechanical strokes in the conventional device so that the vibration is detected. Differing from the conventional device, the abnormal condition detecting device of the present invention can effectively detect the vibration of the rotational tub even when the rotational tub is vibrated either in the longitudinal or transverse direction and even when the vibration amplitude is small.

Preferably, the abnormal vibration detecting device may further comprise switch means for detecting a swinging motion of the rotational tub, the switch means generating a signal in response to the swinging motion of the rotational tub. For example, this switch means may be a switch mechanism comprising an actuator or detecting lever colliding with the rotational tub upon the swinging motion of the rotational tub or a light switch device wherein an optical path is connected and disconnected by the rotational

tub with its swinging motion. In this case, the transverse component of the vibration is detected by the switch means for detecting the swinging motion of the rotational tub and the longitudinal component of the vibration and the transverse component are determined by the abnormal condition determining means.

The abnormal condition determining data stored in the storage means may correspond to the rotational speed rise characteristics of the rotational tub in a range of the rotational speed of the motor between the rotational speed of the motor at a maximum torque thereof or above and an ordinary rotational speed of the motor or below.

Furthermore, the abnormal vibration condition determining data may include data of a set elapsed period from the time of energization of the motor for the purpose of starting and data of a set rotational speed at the time when the set elapsed period has elapsed.

The present invention will be described with reference to the accompanying drawings in which:

FIG. 1 is a circuit diagram showing an electrical arrangement of a washing machine incorporating an abnormal vibration detecting device in accordance with the present invention;

FIG. 2 is a graph showing characteristics of a general electric motor;

FIGS. 3(a)-3(e) are waveform charts for explaining the operation of a phase difference detecting circuit employed

in the abnormal vibration detecting device;

FIG. 4 is a graph showing characteristics of variation in the rotational speed of the washing machine motor;

FIG. 5 is a flowchart explaining the control manner of
5 a microcomputer;

FIG. 6 is a longitudinally sectional view of the washing machine incorporating the abnormal vibration detecting device of the invention;

FIG. 7 is a longitudinally sectional view of a
10 conventional washing machine showing the prior art.

An embodiment of the present invention will be described with reference to FIGS. 1 through 6. FIG. 6 shows the construction of a known automatic washing machine in which the abnormal vibration detecting device in accordance
15 with the present invention is incorporated. An outer cabinet 11 of the washing machine encloses a water-receiving tub 13 elastically suspended therein by an elastic suspension mechanism 12. A rotational tub 14 serving both for wash and for dehydration is rotatably mounted in the water-receiving
20 tub 13. An agitator 15 is rotatably mounted on the inner bottom of the rotational tub 14. A washing machine motor 16 serving both for wash and for dehydration and a mechanism section 17 are mounted on the outer bottom of the water-receiving tub 13. A capacitive induction motor is employed
25 as the washing machine motor 16. A drain hole 18 is formed in the bottom of the water-receiving tub 13 and a drain valve 19 is provided in the vicinity of the drain hole 18.

An air trap 20 is formed adjacent to the drain hole 18. A water-level sensor 22 comprising a pressure sensor is connected to the air trap 20 through an air tube 21. The water-level sensor 22 is disposed in a rear space defined by a top cover 11a of the outer cabinet 11. A water-supply valve 23 and a detection switch 24 are also provided in the rear space. The detection switch 24 comprises a detecting lever 25 and constitutes tub-motion detecting switch means or first abnormal vibration detecting means 26. The detecting lever 25 is mounted to be inclined and to be rotatively moved in the transverse direction or in the direction of arrow A with its upper portion as a fulcrum. The detecting lever 25 usually hangs down as shown in FIG. 6 and collides with the water-receiving tub 13 to be rotatively moved in the direction of arrow A when the rotational tub 14 and that is, the water-receiving tub 13 are abnormally vibrated during the dehydration, as is shown by two-dot chain line in FIG. 6. The detection switch 24 is operated in response to the stroke of the rotative movement of the detecting lever 25. The mechanism section 17 transmits rotation of the washing machine motor 16 only to the agitator 15 in the wash step, thereby rotating the agitator 15. The mechanism section 15 transmits the rotation of the washing machine motor 16 to both the water-receiving tub 14 and the agitator 15 in the dehydration step so that both of them are rotated simultaneously at a high speed.

Referring now to FIG. 1, an alternating current from a commercial power supply 27 is rectified and smoothed by a rectifier circuit 28. Then, the voltage is converted by a voltage regulator circuit 29 to a low DC voltage of 5 volts, for example, as a power supply voltage for electronic circuitry. This low DC voltage is supplied to a control circuit 30 composed of a microcomputer and an analog-to-digital (A/D) converter.

The washing machine motor 16 is connected via triacs 31 and 32 between both terminals of the commercial power supply 27. The drain valve 19 and the water-supply valve 23 are also connected via respective triacs 33 and 34 between both terminals of the commercial power supply 27. The washing machine motor 16 is provided with a phase difference detecting circuit 35 detecting the phase difference between the voltage applied to the motor 16 and the current flowing through it. The phase difference detecting circuit 35 constitutes rotational speed detecting means 36 together with the microcomputer of the control circuit 30.

The phase difference detecting circuit 35 will now be described. A current transformer 37 is provided for detecting the current I_m flowing into the washing machine motor 16. The current detected by the current transformer 37 is converted to a corresponding voltage, which voltage is applied to a non-inverting input terminal (+) of a comparator 38. An inverting input terminal (-) of the comparator 38 is grounded. The power supply voltage is

divided by a resistance and the divided voltage is applied to a non-inverting input terminal (+) of a comparator 39. An inverting input terminal (-) of the comparator 39 is grounded. Output signals from the comparators 38, 39 are supplied to an input terminal of an exclusive OR circuit 40. An output signal from the exclusive OR circuit 40 is supplied to an integrating circuit 41. An output signal from the integrating circuit 41 is then supplied to the control circuit 30. Inputs to an key-input section 42 comprising an operation course selecting switch and a start switch are also supplied to the control circuit 30. A display section 43 is responsive to a control signal from the control circuit 30 to display various pieces of information.

The comparators 38, 39 of the phase difference circuit generate pulses V_v and V_i based on the current I_m and the power supply voltage V_i , respectively, as shown in FIG. 5. Then, the exclusive OR circuit 40 generates phase difference pulses V_θ . An average voltage $V_{\theta a}$ of the phase difference pulses V_θ is generated by the integration circuit 41. This averaged phase difference detection voltage $V_{\theta a}$ is converted by the A/D converter in the control circuit 30 to a digital phase difference detection signal, which signal is supplied to the microcomputer.

Based on the digital phase difference detection signal, the microcomputer detects the rotational speed of the washing machine motor 16. FIG. 2 shows the relationship

between the phase difference and the rotational speed in a general motor. A curve $N-\theta$ in FIG. 2 represents the relationship between the motor phase difference θ and its rotational speed. The phase difference θ shows little
 5 change while the motor speed is changed from "0" to " N_2 " (maximum torque point). However, the phase difference θ is increased with the increase in the motor speed when the motor speed exceeds N_2 . Accordingly, the rotational speed of the motor can be detected by detection of the phase
 10 difference θ in a section between the phase difference θ_2 corresponding to the motor speed N_2 and the phase difference θ_3 corresponding to the rotational speed N_3 . The degree of increase of the phase difference θ is relatively mild in the section from the start to the speed N_1 but rendered
 15 relatively steep when the rotational speed N_1 is increased above N_1 .

FIG. 4 shows rotational speed rise characteristics of the rotational tub 14 in different conditions. The characteristic curve Q_a shows the rotational speed rise
 20 characteristic in the condition that the rotational tub 14 is normally started and its rotational speed is increased to a rated speed without being rotated in the unbalanced state. The characteristic curve Q_b shows the rotational speed rise characteristic in the case where the rotational tub 14 is in
 25 the state of relatively slight abnormal vibration, which vibration can be detected by the detecting lever 25. The characteristic curve Q_c shows the rotational speed rise

characteristic in the case where the rotational tub 14 is in the state of severe abnormal vibration.

The microcomputer serves as second abnormal vibration detecting means. More specifically, the microcomputer has a storage section storing data represented by the above-described characteristic curve Q_b showing the rotational speed rise characteristic in the case where the rotational tub 14 is in the state of relatively slight abnormal vibration. Since this characteristic curve Q_b is shown in the case where the rotational tub 14 is being vibrated slightly abnormally, the rotational speeds in a region above the characteristic curve Q_b do not show an abnormal vibration while those in a region below it show an abnormal vibration.

The rotational speed at which the detecting lever 25 is operated is in the vicinity of N_0 (in the vicinity of time t_0). In the embodiment, the rotational speed N_1 on the characteristic curve Q_b , which rotational speed corresponds to the phase difference voltage V_1 , is set as a reference rotational speed for the detection of the abnormal vibration by the second abnormal vibration detecting means. As described above, this reference rotational speed N_1 is between the rotational speed N_2 corresponding to the maximum torque point of the motor and the normal rotational speed N_3 . The reference rotational speed N_1 appears on the characteristic curve Q_b when a time period t_1 has elapsed from the start of the dehydrating operation. Accordingly,

the microcomputer generates a signal representative of occurrence of the abnormal vibration when the reference rotational speed N_1 is not reached even after elapse of the time period t_1 . The microcomputer performs various operations accompanied by the determination of occurrence of the abnormal vibration, for example, processing for modifying the unbalanced state of the rotational tub 14, when the abnormal vibration is detected by the first abnormal vibration detecting means or by the microcomputer as the second abnormal vibration detecting means.

The operation of the above-described abnormal vibration detecting device will now be described together with control contents of the microcomputer. FIG. 5 is a flowchart showing the control contents of the microcomputer. The control manner shown in FIG. 5 is initiated after completion of a wash or rinse step when an automatic operation course is set. When an independent dehydration course is set, the control manner is initiated based on the operation of the start switch.

The drain valve 19 is opened (step P1) and then, the washing machine motor 16 is energized so that the rotational tub 14 is rotated (step P2). Simultaneously, a timing operation is initiated for progress of the set time period (step P3). Then, it is determined whether the detection switch 24 has been operated or not (step P4). When it is determined that the detection switch 24 has not been operated, the rotational speed is detected based on the

phase difference detection signal $V_{\theta a}$ supplied from the phase difference detection circuit 35 or the A/D converter (not shown) to the microcomputer (step P5). The microcomputer then determines whether or not the rotational
5 speed is at the reference rotational speed value N_1 or below (step P6). When determining that the rotational speed is at the reference rotational speed value N_1 or below, the microcomputer determines whether the reference period time t_1 for determination has elapsed or not (step P7). The
10 microcomputer then determines whether the set dehydration time period has elapsed or not (step P8). When the rotational speed exceeds the reference value N_1 before lapse of the reference time period t_1 , the dehydrating operation is executed until the set dehydration time period elapses.
15 Subsequently, the washing machine motor 16 is deenergized so that the rotation of the rotational tub 14 is stopped, whereby the dehydrating operation is completed (step P9).

In the case where the detection switch 24 is actuated (step P4) or where the rotational speed is at the reference
20 value N_1 or below even when the reference time period t_1 has elapsed (step P7), the microcomputer determines that an abnormal vibration is occurring and executes steps P10 through P14 for correction of the unbalanced state of the dehydration tub. More specifically, first, the washing
25 machine motor 16 is deenergized so that the rotational tub 14 is stopped (step P10) and the drain valve 19 is closed (step P11). Then, the water-supply valve 23 is opened so

that the water is supplied to reach the set water level (step P12). The washing machine motor 16 is then energized so that the agitator 15 is driven for a predetermined period of time (step P13). The drive of the agitator 15 agitates
5 the clothes such that an unbalanced distribution of the clothes in the rotational tub can be dissolved. Subsequently, the drain valve 19 is opened for the drainage (step P14) and then, the microcomputer advances to step P2.

It is considered that the transverse vibration
10 component is larger than the longitudinal vibration component in the vibration mode of the rotational tub 14 and vice versa, depending upon the unbalanced distribution of the clothes in the rotational tub 14. When the transverse vibration component is larger than the longitudinal
15 vibration component, such transverse vibration component is detected by the detection switch 24 via the detecting lever 25.

On the other hand, when the abnormal vibration is in such a mode that the longitudinal vibration component is
20 relatively large and the transverse vibration component is too small to be detected by the detecting lever 25, the abnormal vibration in this mode is detected by the second abnormal vibration detecting means determining whether or not the rotational speed has exceeded the reference value N_1
25 upon lapse of the reference time period t_1 . Since the detection of this kind of abnormal vibration is based on the rotational speed of the washing machine motor 16, even the

abnormal vibration mainly composed of the longitudinal component can be reliably detected, while this kind of abnormal vibration cannot be detected in the arrangement that the actual motion of the rotational tub is converted to
5 a mechanical stroke. Consequently, the abnormal vibration can be reliably detected regardless of the directions of vibration and degree of vibration.

Although the invention is applied to the automatic washing machine in the foregoing embodiment, the invention
10 may be applied to the dehydration control of twin-tub type washing machines.

The foregoing disclosure and drawings are merely illustrative of the principles of the present invention and are not to be interpreted in a limiting sense. The only
15 limitation is to be determined from the scope of the appended claims.

CLAIMS

1. An abnormal vibration detecting device for a washing machine having an outer cabinet, a rotational tub mounted via elastic suspension means in the outer cabinet for
5 enclosing clothes to be washed and an electric motor driving the rotational tub in a dehydration operation, the abnormal vibration detecting device comprising:

a) rotational speed detecting means for detecting a rotational speed of the rotational tub, the rotational speed
10 detecting means generating a detection signal representative of the detected rotational speed of the rotational tub;

b) storage means for storing data of predetermined rotational speed rise characteristics of the rotational tub as abnormal condition determining data, the predetermined
15 rotational speed rise characteristics being in accordance with rise characteristics of the rotational speed of the rotational tub when the rotational tub is rotated in an unbalanced state; and

c) abnormal condition determining means comparing data
20 of the rotational speed represented by the detection signal generated by the rotational speed detecting means with the abnormal condition determining data stored in the storage means, for determining whether or not the rotational tub is being rotated in the unbalanced state.

25 2. An abnormal vibration detecting device according to

claim 1, further comprising switch means for detecting a swinging motion of the rotational tub, the switch means generating a signal in response to the swinging motion of the rotational tub.

5 3. An abnormal vibration detecting device according to claim 1, wherein the abnormal condition determining data stored in the storage means corresponds to the rotational speed rise characteristics of the rotational tub in a range of the rotational speed of the motor between the rotational
10 speed of the motor at a maximum torque thereof or above and an ordinary rotational speed of the motor or below.

4. An abnormal vibration detecting device according to claim 1, wherein the abnormal condition determining data includes data of a set elapsed period from the time of
15 energization of the motor for the purpose of starting and data of a set rotational speed at the time when the set elapsed period has elapsed.

5. An abnormal vibration detecting device according to claim 1, wherein the rotational speed detecting means
20 comprises circuit means for detecting a phase difference between a voltage applied to the motor and a motor current and means for obtaining a signal representative of the rotational speed from a magnitude of the phase difference detected by the circuit means.

6. An abnormal vibration detecting device according to claim 2, wherein the abnormal condition determining data stored in the storage means corresponds to the rotational speed rise characteristics of the rotational tub in a range
5 of the rotational speed of the motor between the rotational speed of the motor at a maximum torque thereof or above and an ordinary rotational speed of the motor or below.

7. An abnormal vibration detecting device according to claim 2, wherein the abnormal condition determining data
10 includes data of a set elapsed period from the time of energization of the motor for the purpose of starting and data of a set rotational speed at the time when the set elapsed period has elapsed.

8. An abnormal vibration detecting device substantially
15 as herein described with reference to the accompanying drawings.

Patents Act 1977
Examiner's report to the Comptroller under
Section 17 (The Search Report)

Application number

GB 9219992.6

Relevant Technical fields

(i) UK Cl (Edition K/L) D1A (AAB, ACA, ACC, ACD, ADN) ;
 F4G (GBCL)

(ii) Int Cl (Edition 5) DO6F

Search Examiner

T M JAMES

Databases (see over)

(i) UK Patent Office

(ii) ONLINE DATABASES: WPI

Date of Search

14 OCTOBER 1992

Documents considered relevant following a search in respect of claims 1-8

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
X	GB 2124662 A (T I DOMESTIC APPLICANCES) see page 2 lines 15-30	1 and 2 at least
X	EP 0349798 A2 (MIELE) see whole document	"
X	EP 0302319 A1 (LICENTIA) see whole document	"
X	US 4411664 (RICHARD & HOLLENBECK) see column 9 lines 41-47	"

Category	Identity of document and relevant passages	Relevant to claim(s).

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases